


THE U-TUBE AND LINEAR Outdoor Low-Intensity Radiant Heaters for Cafes, Restaurants and Public Houses

IP55
PROTECTED-
BURNER BOX



- Durable components such as heat treated aluminised tube, withstand wet weather
- Bathes customers in warmth keeping them comfortable and extending their stay
- Energy efficient by heating tables, chairs and objects rather than the air
- Helps maximise profits by extending your facility without the construction expense
- Assists in reducing maintenance costs due to protection of internal burner components against dust and water

Call: +44 (0) 121 556 4495
www.radiantservices.co.uk

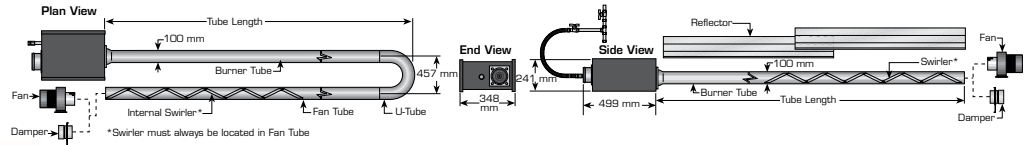

RADIANT SERVICES™ HE U-Tube

RADIANT SERVICES™ HE Linear

Model	HE15UT	HE20UT	HE25UT	HE30UT	HE35UT	HE40UT	HE45UT	HE50UT	HE15ST	HE20ST	HE25ST	HE30ST	HE35ST	HE40ST	HE45ST	HE50ST
Input [kW]	15	20	25	30	35	40	45	50	15	20	25	30	35	40	45	50
Overall Length [mm]	4048	5572	5572	7096	7096	7096	8620	8620	6887	9935	9935	12983	12983	13028	16076	16076
Weight [kg]	39	54	54	65	65	66	96	96	41	55	55	68	68	68	81	81
Gas Consumption [m ³ /h]**																
NG [G20]	1.4	1.9	2.4	2.9	3.4	3.8	4.3	4.8	1.4	1.9	2.4	2.9	3.4	3.8	4.3	4.8
NG [G25]	1.7	2.2	2.8	3.3	3.9	4.4	5.0	5.5	1.7	2.2	2.8	3.3	3.9	4.4	5.0	5.5
LPG Butane [G30]	0.4	0.6	0.7	0.9	1.0	1.1	1.3	1.4	0.4	0.6	0.7	0.9	1.0	1.1	1.3	1.4
LPG Propane [G31]	0.6	0.8	0.9	1.1	1.3	1.5	1.7	1.9	0.6	0.8	0.9	1.1	1.3	1.5	1.7	1.9
Fuel	NG (G20, G25), LPG Propane or LPG Butane (G30, G31)															
Inlet Pressure [mbar]	NG min. (G20) - 15, (G25) - 17.5 LPG min. Butane (G30) and Propane (G31) - 32.5 NG & LPG max. 50															
Heat Exchanger Tubing	3 m Sections, 100 mm dia, 16 Gauge, First 3 m Aluminised Steel Tubing (Remaining Heat Treated Aluminised Steel Tubing)															
Gas Connection [ISO 7-Rp]	1/2"															
Electrical Supply	230 V, 50 Hz, 1 Ø, 1 A															
Electrical Connection	Minimum IP55 Junction Box															
Burner	IP55 Protected (Optional Stainless Steel)															
Exhaust Flue [mm]	100															
Outside Air Supply	Mandatory															
Reflector and End Caps	NS3H14 Aluminium (or 1.4016 2R Stainless Steel as Option)															
Ignition	Fully Automatic, Single Try, Direct Spark, 100% Shut Off, Ignition Flame Rectification Module															
Approved As	Flueless or Flued															
CE Standard	EN 416															
Accessories	Lockout Indication (230V signal)															

**Based on Gross Calorific Value

Clearances to Combustibles * [mm]**

Model	HE15UT	HE20UT	HE25UT	HE30UT	HE35UT	HE40UT	HE45UT	HE50UT	Model	HE15ST	HE20ST	HE25ST	HE30ST	HE35ST	HE40ST	HE45ST	HE50ST	
Horizontal 	A	150	150	150	150	150	150	200	200	150	150	150	150	150	150	150	200	200
	B	890	970	970	1020	1170	1220	1270	1380	890	970	970	1020	1170	1220	1280	1330	1330
	C	1580	1730	1730	1910	1980	2050	2110	2210	1570	1650	1650	1780	1930	1970	2010	2080	2080
	D	760	940	940	1000	1090	1150	1200	1300	890	970	970	1020	1170	1220	1280	1330	1330
45° 	A	200	200	200	200	200	200	200	200	200	200	200	250	250	275	300	300	300
	B	200	200	200	200	200	200	200	200	200	200	200	200	200	200	200	200	200
	C	1500	1650	1650	1860	1960	2040	2110	2160	1500	1660	1660	1860	1960	2030	2110	2160	2160
	D	1070	1170	1170	1320	1550	1620	1680	1780	1370	1520	1520	1630	1750	1820	1880	2000	2000

***Clearances B, C and D can be reduced by 50% for locations 7 m or more downstream of the burner. For other mounting options and associated clearances, complete installation, operation and service criteria, please see the current issue of the Installation, Commissioning, Operation and Service Manual.

Installation Code and Annual Inspections:

All installation and service of RADIANT SERVICES™ equipment must be performed by a contractor qualified in the installation and service of equipment sold and supplied by Radiant Services Limited and conform to all requirements set forth in the RADIANT SERVICES™ manuals and all applicable governmental authorities pertaining to the installation, service and operation of the equipment. To help facilitate optimum performance and safety, Radiant Services Limited recommends that a qualified contractor conduct, at a minimum, annual inspections of your RADIANT SERVICES™ equipment and perform service where necessary, using only replacement parts sold and supplied by Radiant Services Limited.

Further Information:

Applications, engineering and detailed guidance on systems design, installation and equipment performance is available through RADIANT SERVICES™ representatives. Please contact us for any further information you may require, including the Installation, Commissioning, Operation and Service Manual.

These products are not for residential use.

This document is intended to assist licensed professionals in the exercise of their professional judgment.

Radiant Services Limited

Unit A, Kings Hill Business Park
Darlaston Road, Wednesbury
West Midlands WS10 7SH UK

Telephone: +44 (0) 121 556 4495

Fax: +44 (0) 121 556 8142

www.radiantservices.co.uk

© 2009 Radiant Services Limited

All rights reserved. No part of this work covered by the copyrights herein may be reproduced or copied in any form or by any means- graphic, electronic, or mechanical, including photocopying, recording, taping, or information storage and retrieval systems - without written permission of Radiant Services Limited.